
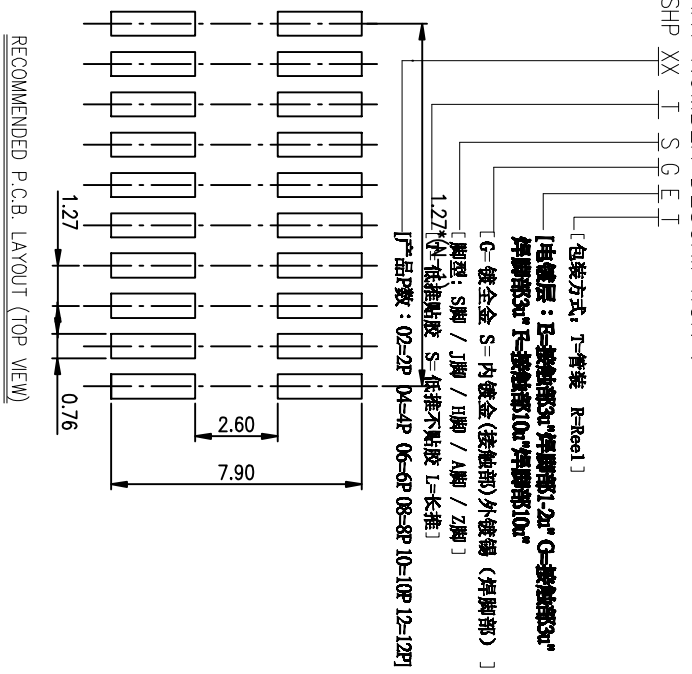
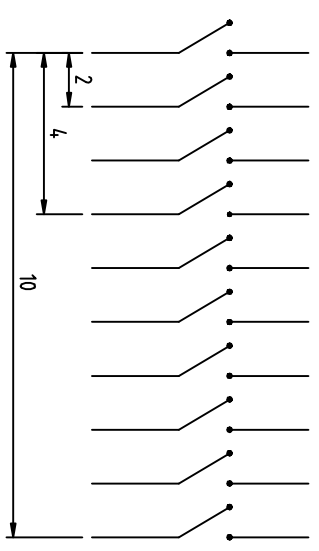

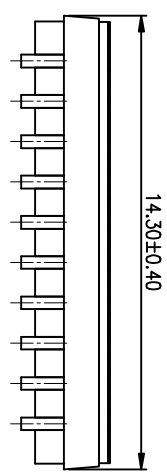



PRODUCT NO.	1
DSHP10TSGE1	2
RohS compliant	3

NOTES :1.Specification:

- 1>.Operating force:1000gf Max
- 2>.Operating Temperature: -40° to+85°
- 3>.Storage Temperature: -40° to+85°
- 4>.Electrical life :1000cycles 25mA 24VDC
- 5>.Mechanical Life:3000cycles Operations

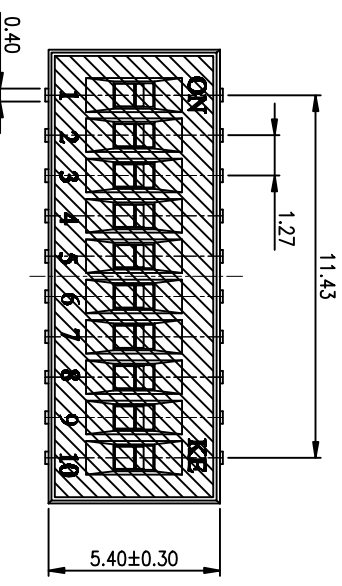

2. PLATING:  
GOLD FLASH 1u"(min.) SOLDERAL,  
3u" GOLD PLATING ON THE CONTACT AREA,  
WITH 50u" NICKEL UNDERPLATINGOVERALL.
3. PART NUMBER DESCRIPTION :

DSHP XX I S G E I

【包裝方式: T=管裝 R=Reel】  
【電鍍層: F=鍍金 3u" 焊腳部 1.2u" G=鍍金 3u" 焊腳部 3u" R=鍍金 10u" 焊腳部 10u"】  
【G=鍍金 S=內鍍金(接觸部)外鍍鎳(焊腳部)】  
【腳型: S腳 / J腳 / 環腳 / A腳 / Z腳】  
【1.27(外)推組行程 S=低推行程 L=長推】  
【產品碼: 02=2P 04=4P 06=6P 08=8P 10=10P 12=12P】

Number	Part Name	Material	Finished
①	Actuator	UL94 V0	White
②	Cover	UL94 V0	Black
③	Movable	Beryllium Copper	3u" Gold
④	Terminal	Brass	1u" Gold
⑤	Base	UL94 V0	Black
⑥	Terminal Contact	Brass	3u" Gold
⑦	Mylar	UL94 V0	0.05mm

TOLERANCE UNLESS OTHERWISE SPECIFIED		INSPECTION COPY	
LINER	ANGLES	PROJECTION	COPY
0 ± 0.25	0 ± 2'	0 ± 0.15	0 ± 1'
.000± 0.10	.00± 0.5'	0.00± 0.10	0.00± 0.5'
DESIGN kathy		03/20/12	
DRAWING		FILE NO. DSHP10TSGE1-A	
CHECK		SIZE UNIT SCALE SHEET REV.	
APPRO.		A4 mm Z : 1 TOP:1 A	

總督精密電子股份有限公司  
DongGuan Kingtek Industrial Co., Ltd.

BY DSHP SERIES PITCH 1.27mm  
PRODUCT FAMILY DSHP SERIES  
PRAT NO. DSHP10TSGE1