
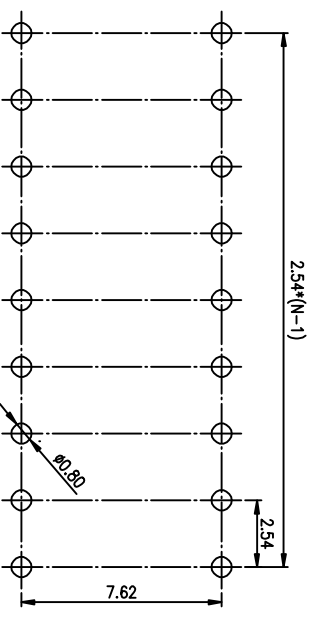
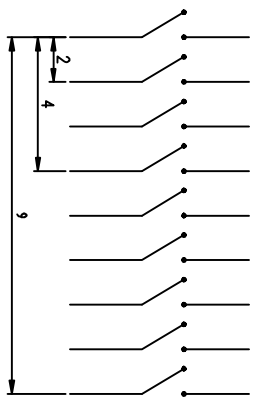

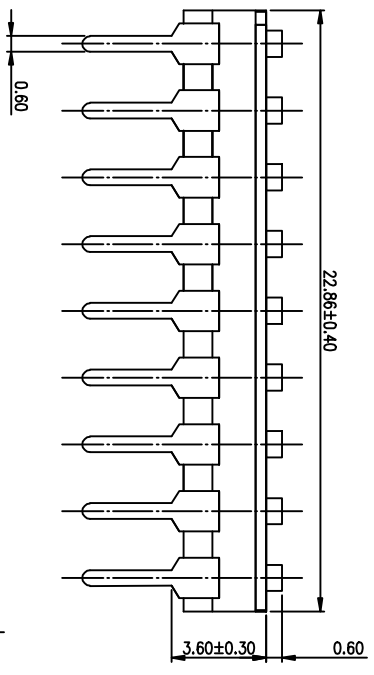
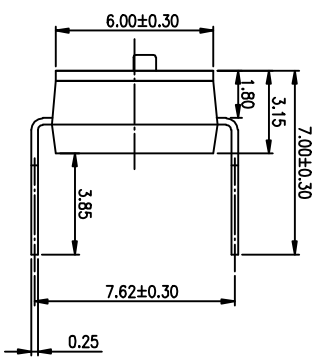



PRODUCT NO.	RoHS compliant
DISCO91HGET	

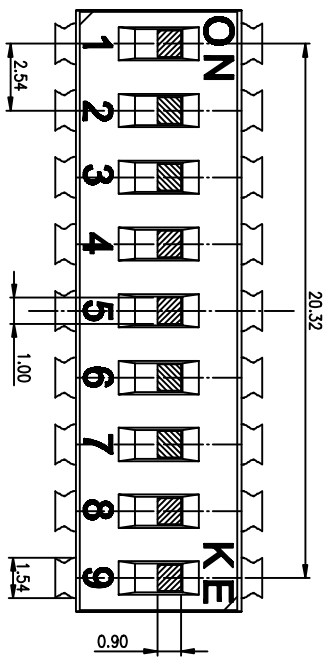

RECOMMENDED P.C.B. LAYOUT (TOP VIEW)

- NOTES :
- Specification:
    - Operating force: 1000gf Max
    - Operating Temperature: -40° to +85°
    - Storage Temperature: -40° to +85°
    - Mechanical Life: 3000cycles minimum
    - Electrical Life: 2000cycles 25mA 24VDC
  - PLATING:
    - GOLD FLASH 1u"(min.) SOLDER TAIL,
    - 3u" GOLD PLATING ON THE CONTACT AREA,
    - WITH 50u" NICKEL UNDERPLATING OVERALL.
  - PART NUMBER DESCRIPTION

- DISC XX I S G E T
- [包装方式: T-管装 R=Roll]
  - [电镀层: B-鍍銀3u" G-鍍鎳3u" 厚鍍銀1-2u"]
  - [G-鍍金 S-內金外鍍]
  - [腳型: S脚 / J脚 / 環脚 / A脚 / Z脚]
  - [T-低插裝 S-低插不裝 L-長插]
  - [产品公差: 01=1P 02=2P 03=3P ..... 12=12P]



Number	Part Name	Material	Finished
①	Actuator	UL94 V0	White
②	Cover	UL94 V0	Black
③	Movable	Copper Alloy	3u"Gold
④	Terminal	Brass	1u"Gold
⑤	Base	UL94 V0	Black
⑥	Terminal Contact	Brass	3u"Gold

TOLERANCE UNLESS OTHERWISE SPECIFIED		INSPECTION COPY	
LINER	ANGLES	PROJECTION	COPY
0 ± 0.25	0 ± 2'		
.00 ± 0.15	.0 ± 1'		
.000 ± 0.10	.00 ± 0.5'		
DESIGN	kathy	2012/04/12	
DRAWING			
CHECK			
APPRO.			

**RE** 總富精微電子股份有限公司  
Dongguan Kingtek Industrial Co., Ltd.

FILE NO.	DISCO91HGET-A
SIZE	UNIT SCALE SHEET REV.
A4	mm 2 : 1 TOF 1 A