

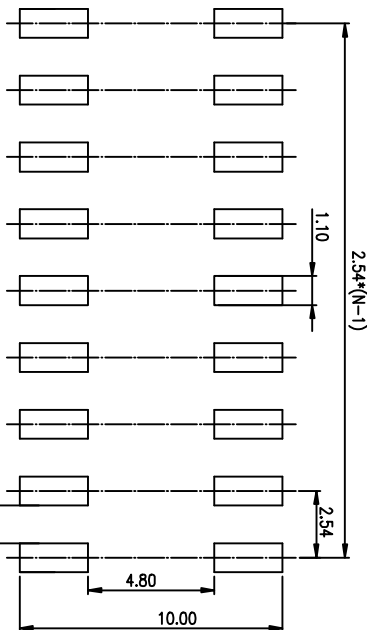
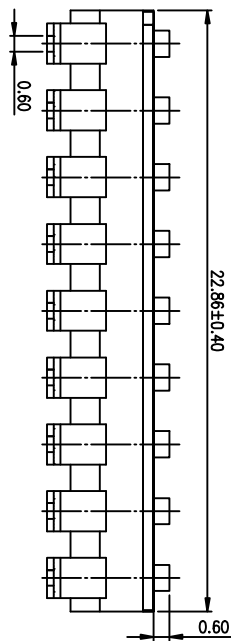




PRODUCT NO.	DISC09LJGET
RoHS compliant	

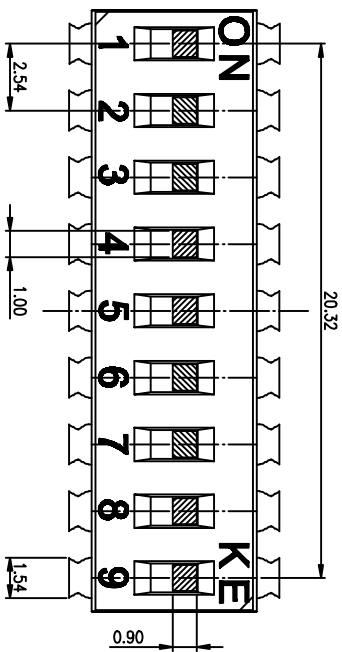

**RECOMMENDED P.C.B. LAYOUT (TOP VIEW)**





(Construction)



- NOTES :
- 1> Specification:
- 1> Operating force: 1000gf Max
  - 2> Operating Temperature: -40° to +85°
  - 3> Storage Temperature: -40° to +85°
  - 4> Mechanical Life: 3000cycles minimum
  - 5> Electrical Life: 2000cycles 25mA 24VDC
2. PLATING:
- GOLD FLASH 1u"(min.) SOLDER TAIL, 3u" GOLD PLATING ON THE CONTACT AREA, WITH 50u" NICKEL UNDERPLATING OVERALL.

3. PART NUMBER DESCRIPTION

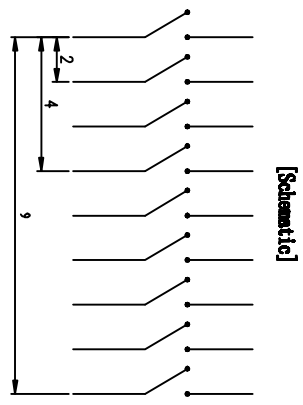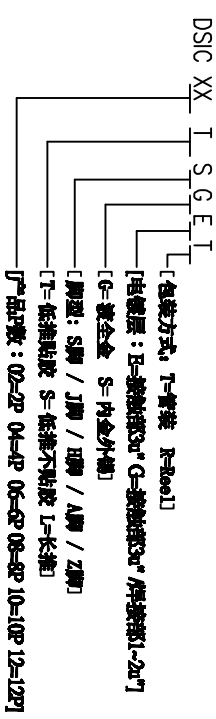

[Schematic]

Number	Part Name	Material	Finished
①	Actuator	UL94 V0	White
②	Cover	UL94 V0	Black
③	Movable	Copper Alloy	3u"Gold
④	Terminal	Brass	1u"Gold
⑤	Base	UL94 V0	Black
⑥	Terminal Contact	Brass	3u"Gold

TOLERANCE UNLESS OTHERWISE SPECIFIED			INSPECTION	
LINER	ANGLES	COPY	PROJECTION	
0 ± 0.25	0. ± 2'			
.00 ± 0.15	.0 ± 1'			
.000 ± 0.10	.00 ± 0.5'			
DESIGN	kathy	2012/04/12		
DRAWING				
CHECK				
APPRO.				

**KE** 德信精密電子股份有限公司  
Dongguan Kingtek Industrial Co., Ltd.

FILE NO.	DISC09LJGET-A
SIZE	UNIT SCALE SHEET REV.
A4	mm 2 : 1 10F 1 A