


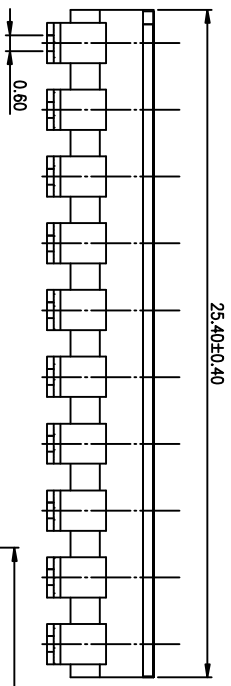
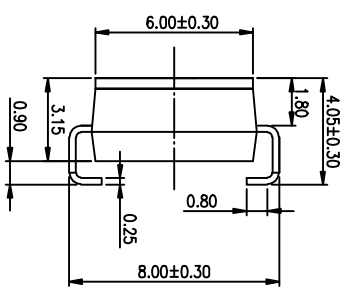
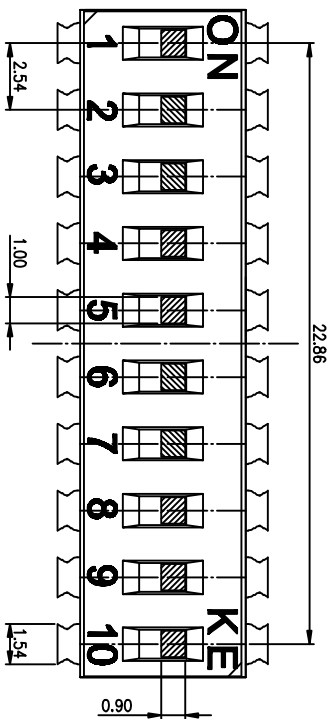


PRODUCT NO.	1
DISCLOSURE	RoHS compliant

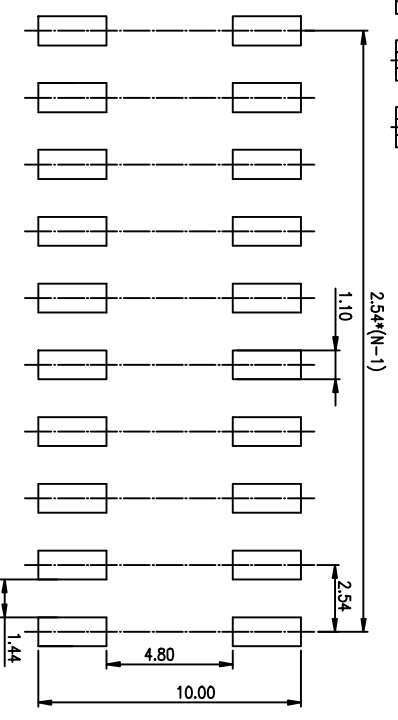



(Construction)



RECOMMENDED P.C.B. LAYOUT (TOP VIEW)

- NOTES :
- 1> Specification:
 - 1> Operating force: 1000gf Max
 - 2> Operating Temperature: -40° to +85°
 - 3> Storage Temperature: -40° to +85°
 - 4> Mechanical Life: 3000cycles minimum
 - 5> Electrical Life: 2000cycles 25mA 24VDC
 2. PLATING:
 - GOLD FLASH 1u"(min.) SOLDER TAIL,
 - 3u" GOLD PLATING ON THE CONTACT AREA,
 - WITH 50u" NICKEL UNDERPLATING OVERALL.

3. PART NUMBER DESCRIPTION

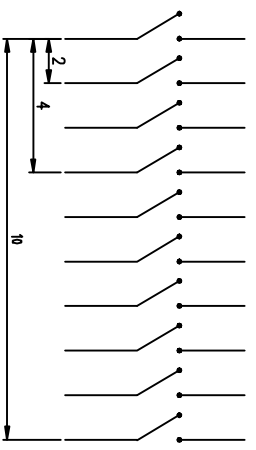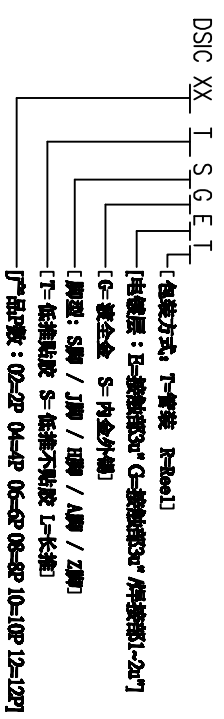

[Schematic]

TOLERANCE UNLESS OTHERWISE SPECIFIED		INSPECTION COPY	
LINER	ANGLES	PROJECTION	COPY
0 ± 0.25	0. ± 2°	0.00 ± 0.15	0. ± 1°
.000 ± 0.10	.00 ± 0.5°	DESIGN	2012/04/12
DRAWING		DRAWING	
CHECK		CHECK	
APPRO.		APPRO.	
<p>東富精機電子股份有限公司 Dongfuchen Kingtek Industrial Co., Ltd.</p>			
TITLE			
BY DISC SERIES PITCH 2.54mm			
PRODUCT FAMILY DISC SERIES			
PART NO. DISCLOSURE			
FILE NO.	DISCLOSURE-A	SIZE	UNIT SCALE SHEET REV.
A4	mm	2 : 1	1 OF 1 A