
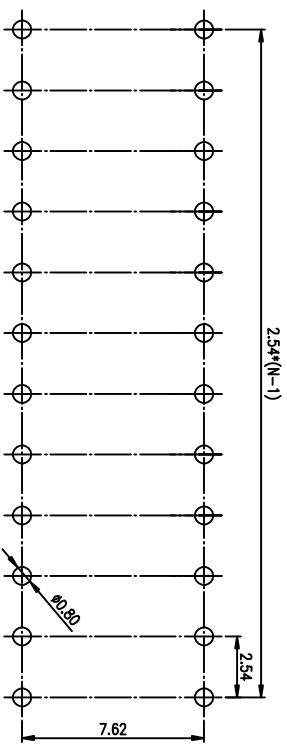
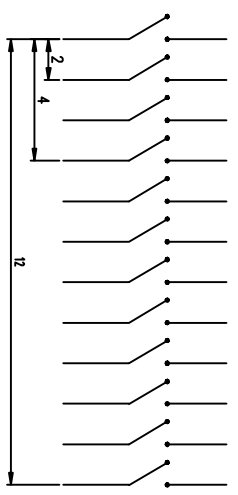

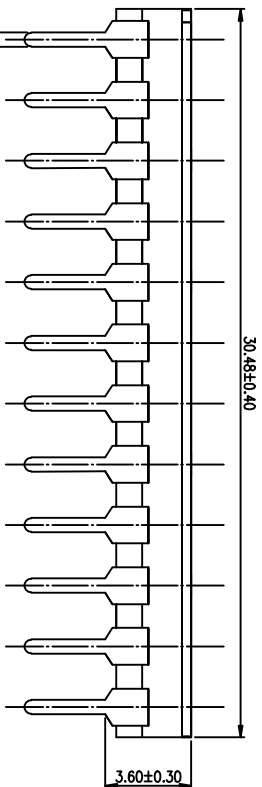




PRODUCT NO.	DSIC12SHGET
RoHS compliant	

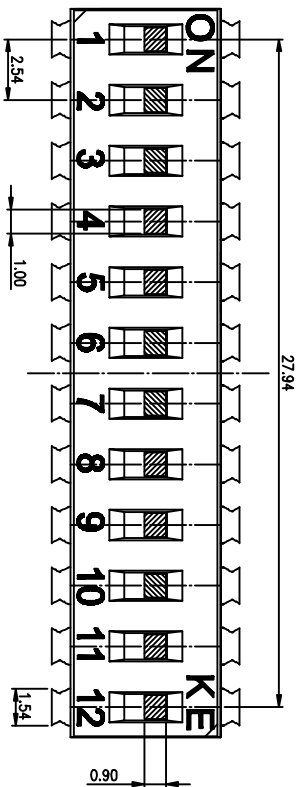

RECOMMENDED P.C.B. LAYOUT (TOP VIEW)

- NOTES :
- Specification:
 - Operating force: 1000gf Max
 - Operating Temperature: -40° to +85°
 - Storage Temperature: -40° to +85°
 - Mechanical Life: 3000cycles minimum
 - Electrical Life: 2000cycles 25mA 24VDC
 - PLATING:
 - GOLD FLASH 1u"(min.) SOLDER TAIL,
 - 3u" GOLD PLATING ON THE CONTACT AREA,
 - WITH 50u" NICKEL UNDERPLATING OVERALL.
 - PART NUMBER DESCRIPTION

- DSIC XX I S G E T
- [包装方式: T-管装 R=Roll]
 - [电镀层: B-镀锡3u" G-镀金3u" P-镀镍1-2u"]
 - [G-镀金 S-内金外镀]
 - [脚型: S脚 / J脚 / 弯脚 / A脚 / Z脚]
 - [T-低档封装 S-低档封装 L-长档]
 - [产品尺寸: 01=1P 02=2P 03=3P 12=12P]



Number	Part Name	Material	Finished
①	Actuator	UL94 V0	White
②	Cover	UL94 V0	Black
③	Movable	Copper Alloy	3u"Gold
④	Terminal	Brass	1u"Gold
⑤	Base	UL94 V0	Black
⑥	Terminal Contact	Brass	3u"Gold

TOLERANCE UNLESS OTHERWISE SPECIFIED		INSPECTION COPY	
LINER	ANGLES	PROJECTION	
0 ± 0.25	0. ± 2'		TITLE
.00 ± 0.15	.0 ± 1'		
.000 ± 0.10	.00 ± 0.5'		BY DSIC SERIES PITCH 2.54mm
DESIGN	kathy	2012/04/12	PRODUCT FAMILY DSIC SERIES
DRAWING			PRAT NO. DSIC12SHGET
CHECK			FILE NO. DSIC12SHGET-A
APPRO.			SIZE UNIT SCALE SHEET REV.
			A4 mm 2 : 1 1 OF 1 A

RE 瑞豐精微電子股份有限公司
Dongguan Kingtek Industrial Co., Ltd.