

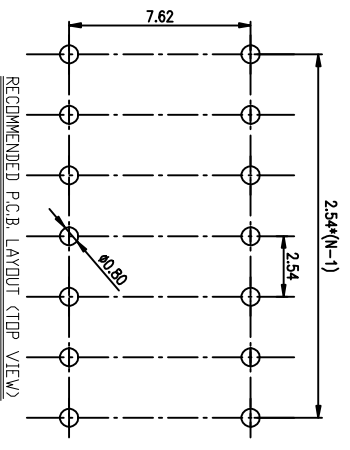
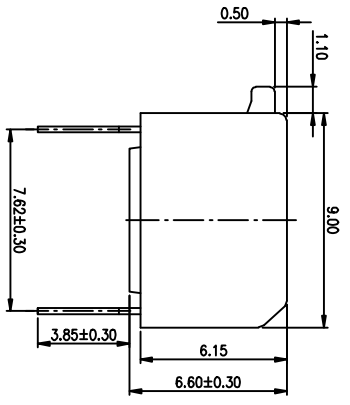
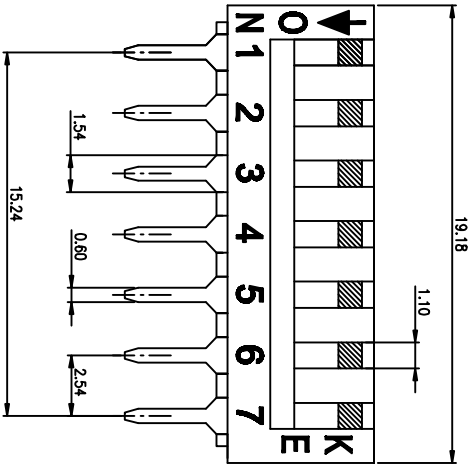


PRODUCT NO.	DSPV07LHGCT
RoHS compliant	



NOTES :

- 1.>Specification:
  - 1>.Operating force:1000gf Max
  - 2>.Operating Temperature: -40° to+85°
  - 3>.Storage Temperature: -40° to+85°
  - 4>.Mechanical Life: 3000cycles minimum
2. PLATING:
  - GOLD FLASH 1u"(min.) SOLDER TAIL,
  - 3u" GOLD PLATING ON THE CONTACT AREA,
  - WITH 50u" NICKEL UNDERPLATINGOVERALL.
3. CONTACT RATING:
  - 1.SWITCHING: 25mA at 24ADC
  - 2.NON-SWITCHING: 100mA at 50VDC
  - WITH 50u" NICKEL UNDERPLATINGOVERALL.
4. PART NUMBER DESCRIPTION :

DS XX I S G E T  
 [Packing:T=Tube R=Reel]  
 [Finish:E=3u" Gold-plated F=10u" Gold-plated]  
 [Finish:G=Full Gold S=Contact-Gold-plated ]  
 [Terminal:S=SMD type H=Straight..... ]  
 [Actuator:T=Tape sealed S=Low profile W/O Tape L=Extension]  
 [HP=Half-Pitch IC=C type PV=Plano type]

Number	Part Name	Material	Finished
①	Actuator	UL94 V0	White
②	Cover	UL94 V0	Black
③	Movable	Copper Alloy	3u" Gold
④	Terminal	Brass	1u" Gold
⑤	Base	UL94 V0	Black
⑥	Terminal Contact	Brass	3u" Gold


TOLERANCE OTHERWISE SPECIFIED	UNLESS SPECIFIED	INSPECTION COPY
0 ± 0.25	0 ± 2'	PROJECTION
.00 ± 0.15	.0 ± 1'	
.000± 0.10	.00± 0.5'	

DESIGN	kathy	2013/01/12
DRAWING		
CHECK		
APPRO.		

FILE NO.	DSPV07LHGCT-A
SIZE	UNIT SCALE SHEET REV.
A4	mm 2 : 1 TOP 1 A



BY DSPV SERIES PITCH 2.54mm  
 PRODUCT FAMILY DSPV SERIES  
 PRAT NO. DSPV07LHGCT